

PetTec

# Pet Cam Feel



WATCH  
YOUR **PET**

For a rewarding  
relationship



## HERE WE GO...

Thank you for choosing our pet cam. With the PetTec Pet Cam Feel you'll always have your darling in view.

## Important safety instructions


READ ALL INSTRUCTIONS AND WARNINGS IN THIS OPERATING MANUAL BEFORE USING THE PET CAM Feel.

- Please do not disassemble and modify the PetTec Pet Cam Feel. The device requires neither maintenance nor servicing. In case of malfunction, please contact our customer service.
- In order to ensure proper use of the device, we recommend that you only use the original parts. Use only the supplied assembly parts for mounting the device.
- The device should not be affected by any renovation work, be it the use of paint or wallpaper.

### Legal Notice


- The PetTec Pet Cam Free has been designed for indoor use only. Laws in your country may limit observation of areas outside of your home or property. Please inform yourself about local legislation. To protect the privacy of others, mount the camera so that you cannot record images of public areas, streets, or your neighbor's property. We also recommend informing relatives, visitors and domestic workers about the camera and its function.
- Please note that the app will not inform you automatically in case of emergency or burglary. If necessary, an emergency call must always be placed by yourself. Stage10 GmbH does not provide any form of guarantee for missing or incorrect notifications or recordings.

# PRODUCT OVERVIEW

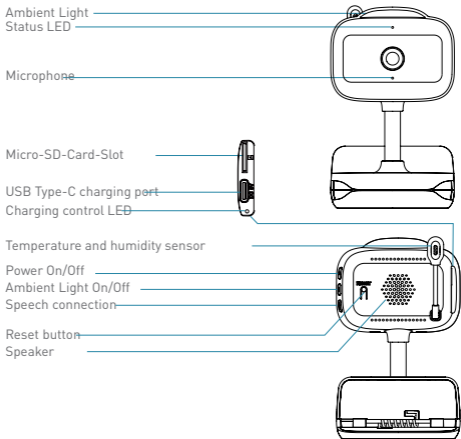

## Content:








- PetTec Pet Cam Feel
- Power plug
- USB Type-C to -A Cable
- Manual
- Screws and dowels
- Drilling template







# IMPORTANT INSTRUCTIONS

## Status LED (front side)

-  • Permanently red LED – no connection to internet possible
  -  • LED blinking red – ready to connect to Wi-Fi
  -  • LED blinking red quickly – Wi-Fi connection is in progress.
- 
-  • Permanently blue LED – connection to Wi-Fi works properly
  -  • LED blinking blue – ready for manual connection to Wi-Fi
  -  • LED blinking blue quickly – manual Wi-Fi connection is established.
- 
-  • No LED – The camera is turned off / not operational.

## Charge control LED (in plug compartment)

-  • Orange LED - camera is charging
- 
-  • Green lit LED - battery is fully charged

## USB Type-C cable feeder

The connector supplies power to the camera. If required, conventional USB Type-C cables with different lengths may be used.

## Microphone/speaker

The combination of built-in microphone and speaker allows two-way communication.

## Micro-SD card slot

Micro-SD cards up to 128GB in size may be used.



### **Reset button**

The reset button must be pressed with a narrow object for approx. 5 seconds to allow the camera to be reset to factory default settings.

To activate manual Wi-Fi setup, the reset button has to be pressed by a narrow object for about 1 second.

### **Power button**

Pressing the power button switches the camera on or off!

### **button**

The  button triggers a call! In this case, the user of the app is contacted via video call!

### **LED button**

Pressing the LED button turns the ambient light on or off! Individual settings can be made in the settings of the camera



## GETTING STARTED

1. Please connect the camera with a micro-USB cable and plug it into the charger plug. The power plug must be connected to a power outlet.
2. After about a minute, the camera will beep and the LED will flash red. This signals that the camera is ready to connect to the Wi-Fi network.
3. Download the „**PetTec Snoop Cube**” app from the Apple App Store or Google Play Store and install the app on your mobile device. Now follow the instructions in the app to complete the camera setup successfully.
4. A Wi-Fi router with internet connection and the associated password must be available. Your mobile device must be connected to the Wi-Fi network of your router on which you want to connect the camera.
5. A stable Wi-Fi connection is required to ensure proper operation.



PetTec Snoop Cube App




## MOOUNTING OPTIONS




### Screwed mounting

1. Attach the screws to the wall according to the position of the drilling template. Do not tighten the screws all the way, as you will need to leave a gap to hang the camera.
2. Engage the mounting holes of the camera (at the bottom) into the screws and press the camera down until it is fixed.



### Mounting with the clamp

1. Clamp the camera with **1**, e.g. on the edge of a piece of furniture, and turn the housing to find an ideal viewing angle.
2. Turn **2** to adjust the viewing angle.



### Free setting

1. The camera also stands freely on the clamp.
2. Simply place the device in a safe place.



## TECHNICAL DETAILS

<b>Requirements</b>	<ul style="list-style-type: none"><li>• High-Speed-Internet</li><li>• WiFi Connection</li><li>• Frequency 2.4 GHz</li></ul>
<b>Data storage</b>	<ul style="list-style-type: none"><li>• Supports Micro-SD cards up to 128 GB</li><li>• Micro-SD cards available separately (Requires class 10 oder higher)</li></ul>
<b>Video &amp; Audio</b>	<ul style="list-style-type: none"><li>• Resolution: 2304 (H) x 1296 (V)</li><li>• Format: H.264</li><li>• Field of vision: 110°</li></ul>
<b>Image sensor</b>	<ul style="list-style-type: none"><li>• Night vision: up to 10 m</li><li>• Full color</li><li>• 1/2.8" 3 Megapixel CMOS</li><li>• Digital zoom</li></ul>
<b>Audio</b>	<ul style="list-style-type: none"><li>• Loudspeaker</li><li>• Microphone</li></ul>
<b>Motion and noise detection</b>	<ul style="list-style-type: none"><li>• Motion detection: 3 setting options available</li><li>• Noise detection: 3 setting options available</li><li>• Instant push notifications</li></ul>
<b>Temperature and humidity detection</b>	<ul style="list-style-type: none"><li>• Upper and lower limit freely adjustable</li><li>• Immediate push notifications for values outside the set limits</li></ul>
<b>Dimensions &amp; Weight</b>	<ul style="list-style-type: none"><li>• Dimensions: 79 x 87 x 129mm</li><li>• Weight: 200g</li></ul>





<b>Rechargeable battery</b>	<ul style="list-style-type: none"><li>• Battery capacity: 3,350mAh Li-Ion battery</li><li>• Charging via USB ty-C cable via USB.power supply unit</li><li>• Charging time: 6-8 hours</li><li>• Battery life: Ca. 5 hours</li></ul>
<b>Energy</b>	<ul style="list-style-type: none"><li>• Maximum power consumption: 2.5W</li><li>• Rated power (USB-C): DC 5V/1A</li></ul>

## IMPORTANT INFORMATIONS

### Radio signal

The radio transmission signal may be adversely affected by external influences (e.g., electric motors, defective electrical appliances). The range of the radio transmission signal is usually limited within buildings. Similarly, the structural works/conditions affect the radio range of the device. Bluetooth devices such as headphones or speakers can also negatively affect the radio signal of the device. The signal strength can also be reduced by environmental influences such as humidity.

### Environmental protection

Please note that non-disposable electrical and electronic appliances as well as batteries must be recycled separately and in an environmentally friendly manner (European Directive on Waste Electrical and Electronic Equipment). Use the country-specific return and collection systems for the recycling of electrical and electronic appliances as well as for batteries. Disposal of batteries in household waste is prohibited.



## CUSTOMER SERVICE

### Declaration of conformity

Stage10 GmbH confirms that the product described in these instructions (Pet Cam Feel) conforms to guideline 2014/53/EU. The complete text of the EU declaration of conformity is available at the following URL:



<https://support.pettec.de/hc/de>



**Declaration of conformity** (see chapter „Declaration of conformity“): Products designated with this symbol fulfill all applicable community provisions of the European Economic Area.



Stage10 GmbH declares that, on the date the equipment accompanied by this declaration is placed on the market, the equipment conforms with all technical and regulatory requirements of the relevant directives, regulations and standards.

## MANUFACTURER INFORMATION AND SERVICE

If you have questions about the PetTec Pet Cam Feel or experience problems using it, first contact us via email at the following address: [info@PetTec.de](mailto:info@PetTec.de)

PetTec® is a brand of Stage10 GmbH | Leipziger Platz 9 | 10117 Berlin | [www.PetTec.com](http://www.PetTec.com)

# DISPOSAL



## Disposing of packaging

Please sort the packaging before disposal:

- Cardboard and paperboard with paper recycling
- Plastic wrap with recyclables



## Disposal of devices

Applicable in the European Union and other European countries with systems for the separate collection of recyclables.

### **Do not dispose of used devices with household trash!**

If your Pet Cam Free is no longer usable, each user is obligated by law to dispose of used devices separately from household trash, e.g. at a collection site in your municipality. This ensures that used devices are recycled properly and that negative environmental effects are avoided. Therefore, electronic devices are marked with the symbol shown here.

You can find further information about our products, troubleshooting, and helpful tips at:  
[support.PetTec.de](https://support.PetTec.de)

**PetTec® ist eine Marke  
der Stage10 GmbH**

Leipziger Platz 9  
10117 Berlin  
Deutschland

**[www.PetTec.com](http://www.PetTec.com)**

PetTec Pet Cam Feel  
Art-No. 16206  
EAN 4 250541 926642



**UK  
CA**