

PETTEC

Modular Remote

Fernbedienung zur Erweiterung der PetTec Modular Trainer¹

Remote control to complement the PetTec Modular Trainer¹

Télécommande pour compléter le PetTec Modular Trainer¹



TEACH
YOUR **DOG**

For a rewarding
relationship

¹Nur mit separat erhältlichem Modular Trainer funktionsfähig.


¹Works only with the Modular Trainer (sold separately).

¹Ne fonctionne qu'avec un dispositif de dressage Modular Trainer (vendus séparément).



Table of contents



 Introduction	4
Product overview	5
Initial operation	6
Application	6
Function overview and LED notifications	9
Charging the battery	10
Pairing the remote control and Trainer	11
Proper dog training	14
Customer service	16
Explanation of symbols and terms	17



Introduction

Thank you for choosing our product. You can connect the Modular Remote with the Modular Spray or Modular Vibra Trainer (available separately) to discourage your dog from unwanted behavior. Train your dog effectively, also from a distance.

Important

- Please read the instructions and safety indications carefully before using this product.
- This device works only when connected to the PetTec Modular Vibra or Modular Spray Trainer.

Important Information

- In the following material, Modular Remote refers to the remote control unit; Modular Spray Trainer and Modular Vibra Trainer refer to the training collars (available separately) with which the remote control can be paired.
- We use the term "remote training" to mean manually operating the training collar using the remote control unit.
- The anti-bark mode describes the function in which the collar responds to a dog's barking.

Safety notice

For safe operation, please observe the following guidelines:

- Only intended for targeted training sessions, and not suitable for extended use (max. 1-2 hours per day).
- Keep out of reach of children.
- Do not attempt to disassemble or modify the device.
- Use only the included charging cable to charge the battery.
- Keep the device away from sources of heat, (such as fire) and from prolonged exposure to sunlight.
- Do not immerse the device in water or other liquids.

Product overview

Package contents

- Modular Remote
- Micro-USB charging cable
- Instructions
- Hand strap for remote control

Overview remote control

- 1 Antenna
- 2 LED status display
- 3 Selection of connected Trainers (Modular Vibra/Modular Spray)
- 4 Display for function overview
- 5 Training signal strength selector
- 6 Textured buttons for sound, spray/vibration, and light
- 7 Charging port with rubberized closure
- 8 Hand strap opening

Remote control

- Dimensions: 150 x 49 x 22 mm
- Weight: 80 g

Technical Data

- ✓ Up to 600m range
- ✓ Additional tone signal
- ✓ IP65 water jet protection
- ✓ Up to 10-day battery life
- ✓ 5 training signal levels
- ✓ Expandable with a second collar*

*Train 2 dogs simultaneously with one remote control.





Initial operation

Remote

The display and background illumination of the remote control are automatically turned on whenever one of the buttons is pressed. The background illumination remains on for 20 seconds and then turns off if no other button is pressed. If the remote control is not used for 5 minutes thereafter, the display turns off and the remote control goes into energy-saving mode. The unit will be active and ready to use when a button is pressed again.

Application

Important: This remote control works only with the PetTec Modular Vibra or Modular Spray Trainer.

1 Selection of connected Trainer

The selection button allows the user to choose from two different Trainers (sold separately). This allows you to use one remote control to control two Trainers simultaneously.

2 Selection of training signal strength

Adjust the strength of the tone signal and the spray or vibration strength, depending on the connected Trainer (Modular Spray or Modular Vibra Trainer).

3 Tone signal button

The tone signal button triggers an audible tone on the training collar. The strengths of the tone signal can be set by the adjustment buttons (▲▼). The volume is increased or decreased incrementally by pressing the up and down buttons.

4 Vibration and spray signals

Pressing the training signal button will trigger the corresponding signal (spray or vibration) from the training collar.* The intensity of

*Training collar (Modular Spray or Modular Vibra) is available separately.



the training signal is set manually using the adjustment buttons. The vibration or spray strength is adjusted incrementally using the up and down buttons (▲▼).

5 Locator light button

Pressing this button causes two LED's on the training collar to flash.



PetTec tip

You can connect up to two training collars to one remote control, letting you train two dogs simultaneously. You can read more about this topic on page 28.



Individually adjustable training signal strengths

When paired with a Modular Trainer*, the Modular Remote features 5 different training signal levels, »1« being the weakest and »5« the strongest. The right signal level for your dog depends on his temperament and sensitivity to the training signal (spray or vibration). So always start with the weakest signal level and work your way up until you find the right intensity. Your dog will show a mild reaction when you reach the correct signal level. One such reaction would be tensing of the neck muscles. If he does not notice the signal, you should increase the strength.





Maximum range of the remote control

The Modular Remote can transmit a training signal to a Modular Trainer from up to 600 m away. The range can be less, depending on the terrain and surroundings. To maximize the range, you can hold the remote control up in the air.

*Training collar (Modular Spray or Modular Vibra) is available separately.

Function overview and LED notifications

Remote control LED indications

Button	Function	Meaning of LED signal
Tone 	Produces an audible tone signal.	Red LED glows as long as the button is pressed.
Vibra/Spray 	Transmits a vibration or spray signal to the training collar.	Red LED glows as long as the button is pressed.
Light 	Turns the locator light on the collar on and off.	Red LED glows as long as the button is pressed.
Press the Light and Up buttons simultaneously 	Connecting and disconnecting devices	LED flashes red three times.

Display and LED indications



Indicates the current training signal level, which can vary from 0 (switched off) – 5 (strong).



Indicates the currently selected training collar.



Displays the current battery level. The signal begins to blink when the battery level is very low.



Charging the battery

- Charge the battery completely before the first use (this may take up to 2 hours).
- Do not charge the battery near flammable substances.
- The battery must be completely recharged if the Trainer has not been used for more than three months.

The battery must be recharged if:


- the battery indicator on the remote control shows only one bar instead of three bars.
- the indicator light on the remote control does not light up.

Important information

The remote control battery is only partially charged at the factory. The first complete charge may take up to two hours.

Charging the remote control

Charge the remote control completely, using the included charging cable, until the indicator bars on the unit are full. To do this, open the rubber cover on the back of the remote control and insert the charging plug into the opening provided. Then connect the USB connector to the adapter and plug the charging device into a power outlet. A complete charging cycle takes about two hours.

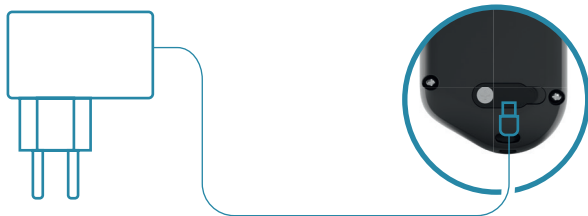



Pairing the remote control and Trainer

Important

- The Modular Remote can only be paired with the Modular Vibra or Modular Spray Trainer collars. These items can be purchased separately! ▶ <https://pettec.de/shop/trainer/>
- Carefully read the instructions and safety notice for the training collars before using.
- Only connect and disconnect the devices when your dog is not wearing the training collar.

Important information

- Completely charge the remote control and training collar before pairing the devices.
- The Modular Remote works with both training collars (Modular Spray and Modular Vibra Trainer).
- Up to 2 training collars can be paired with a single remote control. This means that you can control both a Modular Spray and a Modular Vibra Trainer (both available separately) with the Modular Remote.

Initial pairing of the remote control with a training collar (for remote training)

- Turn on the training collar and check the battery level.
- Then press and hold the »S« (Sensitivity) button on the training collar for several seconds, until a »P« (Pairing) shows on the LED display. Now the training collar will be in pairing mode for about 20 seconds.
- Now take the Modular Remote and press the »Up« and »Light« buttons simultaneously for several seconds. The indicator LED on the remote control will flash red three times, signaling that it is ready to connect.
- Now the remote control will connect to the training collar within several seconds. Upon successfully connecting, the indicator LED on the Trainer will glow green.

Note: see photo gallery p. 27



- To test the connection, press the »Light« button on the remote control. If the connection is successful, both LED's on the training collar will now illuminate.
- Please start again with step 1 if the remote control and training collar fail to connect.

Pairing and disconnecting the remote control to/from a training collar

Disconnecting the devices to use the anti-bark mode

1. Be sure that both devices are turned on.
2. Press and hold the »Up« and »Light« buttons on the Modular Remote simultaneously for several seconds. The indicator LED on the remote control will flash red three times and the unit will beep.
3. The devices are now disconnected from each other, and the training collar can now be used as an anti-bark device without using the remote control.

Reconnecting the devices for use with remote training

1. Be sure that both devices are turned on.
2. Press and hold the »Up« and »Light« buttons on the Modular Remote simultaneously for several seconds. The indicator LED on the remote control will flash red three times, signaling that it is ready to connect.
3. Now the remote control will connect to the training collar within a few seconds. Upon successful connection, the indicator LED on the Trainer will glow green.
4. Now you can use the devices for remote training again.

Note

To pair a training collar with a brand new remote control, you will need to complete the procedure for establishing an initial connection.



Modular Remote



Modular Spray Trainer



Modular Vibra Trainer



Pairing with a second training collar

1. Set the training collar selector switch on the remote control from 1 to 2.
2. Turn on the training collar and check the battery level.
3. Then press and hold the »S« (Sensitivity”) button on the training collar until you hear a beep and a »P« (Pairing) appears on the LED display. Now the training collar will be in pairing mode for about 20 seconds.
4. Now press and hold the »Up« and »Light« buttons on the Modular Remote simultaneously for several seconds. The indicator LED on the remote control will flash red three times, signaling that it is ready to connect.
5. Now the remote control will connect to the training collar within a few seconds. Upon successful connection, the indicator LED on the Trainer will glow green.
6. To test the connection, press the »Light« button on the remote control. If the devices have connected, both LED's on the training collar will light up.
7. Please start again with step 1 if the remote control and training collar fail to connect.

Proper dog training

Proper dog training is the key to a harmonious relationship between dogs and humans, but dog owners often reach the limit of their abilities when training their four-legged friends. The Modular Remote is an innovative aid for dog training, helping you effectively discourage your pet from unwanted behavior. With the Modular Remote you can directly intervene from a distance, letting you react immediately to unwanted behavior. Most dogs will permanently correct their behavior after one or two uses of the Modular Trainer. Please remember that the Remote is a training device and not a toy, and must always be used carefully. So we would like to ask that you observe the following guidelines:

Before training

1. Be sure that your dog's misbehavior is not a result of insufficient physical activity or health problems. In this case discontinue using the Trainer and seek professional advice.



2. Get your dog accustomed to wearing the training collar for a full day before using it.
3. For safety, do not let your dog swim while wearing the Trainer. Its weight, or the training signals, could hamper your dog's ability to swim. If the Trainer gets wet, simply let it dry. To avoid getting moisture inside the Trainer, never open the rubber cover of the charging port when the device is wet!

During training

1. Immediately remove the trainer if your dog appears agitated.
2. Always use the trainer carefully. As with other types of training, give your dog clear, specific commands. Your dog must first learn these to be able to react appropriately.
3. Conduct training for a maximum of 1-2 hours per day. Remove the trainer after each session and turn it off.
4. Always reward your dog after successful training sessions!



Customer service

If you have any questions about the Modular Remote, please send an email to the following address: info@PetTec.de

PetTec® is a brand of the
Stage10 GmbH
Torstraße 49
10119 Berlin
www.PetTec.com

You can find further information about our products, troubleshooting, and helpful tips for training and using our Trainers at:

support.PetTec.de

Explanation of symbols and terms

Declaration of conformity

Stage10 GmbH hereby declares that the product Modular Remote described in this operating manual complies with Directive 2014/53/EU.



pettec.de/faq/modular



Declaration of conformity (see chapter „Declaration of conformity“): Products designated with this symbol fulfill all applicable community provisions of the European Economic Area.



This symbol certifies that the device's electromagnetic interference is below the limit approved by the United States Federal Communications Commission.

Disposal



Disposing of packaging

Dispose of the packaging according to type:

- Cardboard and carton to waste paper
- Foils in the recycling collection



Disposing of the device

Applicable in the European Union and other European countries with systems for separate collection of recyclable materials.



Old devices must not be disposed of in household waste!

If the Modular Remote Trainer can no longer be used, all consumers are required by law to hand over the old devices separate from household waste, for example, at a collection point of their local community/district. This ensures that the old appliances are properly recycled and that negative effects on the environment are avoided. That is why electrical devices are marked with the symbol shown here.

Modular Remote

Fernbedienung zur Erweiterung der PetTec Modular Trainer¹

Remote control to complement the PetTec Modular Trainer¹

Télécommande pour compléter le PetTec Modular Trainer¹

¹Nur mit separat erhältlichem Modular Trainer funktionsfähig.

¹Works only with the Modular Trainer (sold separately).

¹Ne fonctionne qu'avec un dispositif de dressage Modular Trainer (vendus séparément).